


Internal Airlift/ Helicopter Slingable Container Unit (ISU®)



One example of an ISU® container configuration (ISU®'s can be customized to meet your specifications)

| P/N | NSN | COLOR | GSA | DLA | |
|------------|------------------------|-------|-------------------------|-----|--|
| *56175-000 | 8145-01-564-8057 | GREEN | • | | |
| *56275-000 | 8145-01-564-8056 | TAN | • | | |
| DIMENSIONS | | | | | |
| EXTERIOR | 108"W X 88"L X 91.35"H | | | | |
| INTERIOR | 385 cu.ft. | | | | |
| WEIGHT | PAYLOAD CAPACITY | | MAXIMUM GROSS WEIGHT | | |
| 1,700 lbs. | 10,000 lbs. | 11 | 11,700 lbs. | | |

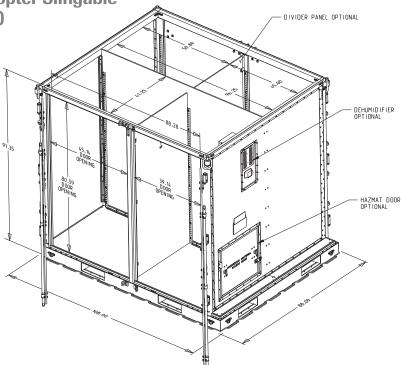



- See Military Certifications starting on page 2.1.4
- See Optional Kits starting on page 2.5.1
- See Optional Accessories starting on page 2.6.1

For more information or for a single part number for a customized ISU® Container, call 800-355-2015



War Readiness Spare Kit (WRSK) Storage Container

FEATURES

- Four doors, one wide door (45") and one narrow door (39") on each 108" end
- Equipped with aisleway for ease of loading on an aircraft
- Four-way forkliftable
- Intermodal transportable by air, land, sea or rail
- Stackable two-high when loaded with up to 10,000 lbs. or empty
- Compatible with standard military transport vehicles/equipment 2.5-ton and 5-ton - FMTV, LMTV, HEMTT, Flatrack, CROP, etc.
- Base pre-drilled for optional caster set
- Ready for use with low or high-speed mobility wheel set
- All aluminum extruded, mechanically fastened pallet base certified not to damage aircraft roller systems
- · Winching rings located at every lower corner
- · Retractable folding steps for easy roof access for sling hookup